PRODUCT INFORMATION AND SPECIFICATION SHEET

WALL OUTLETS – 117 MM

WALL OUTLETS – 117 MM || PRODUCT INFORMATION

DESCRIPTION

Meljac's 117 mm surface mounted wall outlet assembly can accommodate two power receptacle or low-voltage ports. The specified components are included with the plate assembly.

Made in France.

PERSONALIZED PLATE DETAILS

FINISHES

Cover plates are made-to-order in any of the finishes included in the Meljac Finish Catalog. Meljac offers over 30 finishes in materials including chrome, copper, gunmetal, nickel. brass and bronze.

Powdercoating is available in any specification from the RAL Color Chart.

Custom-matched finish options are also available, dependent upon project size and finish details.

RECEPTACLE AND PORT OPTIONS

• 15A 125VAC TR Receptacle (Black or White)
• 20A 125VAC TR Receptacle (Black or White)
• USB-A Charging Port (2.1A 5VDC)
• RJ45 Data Receptacle (Cat6)
• RJ11 Phone Jack Receptacle
• Speaker Binding Posts
• F Connector Cable Receptacle
• Cable pass-through

Please contact Meljac North America for any specialized port requests or questions.

SCREW TYPE	EDGE TYPE	RECEPTACLE COVERS
• Visible - Torx Head	• Beveled	• No covers
• Visible - Slot Head	• Straight	• Single cover
• Hidden		• Dual covers

GFI/GFCI LOCATIONS

Meljac does not offer a GFI receptacle. To satisfy code in locations like kitchens or bathrooms, our standard 15A or 20A receptacles can be used with a GFCI breaker at the electrical panel or by using an inline GFI device.

BACK BOX

Visible screw plates 117 mm plates are compatible with any single-gang box or ring.

Hidden screw plates must use either the Meljac MELUS11782 back box or a compatible 3rd party option. See Plate Size and Back Box Guide for options.

Proprietary Meljac back boxes are stocked and available for immediate purchase from Meljac North America.

Note: back boxes must be installed at a level position to prevent a crooked plate installation.

CERTIFICATION
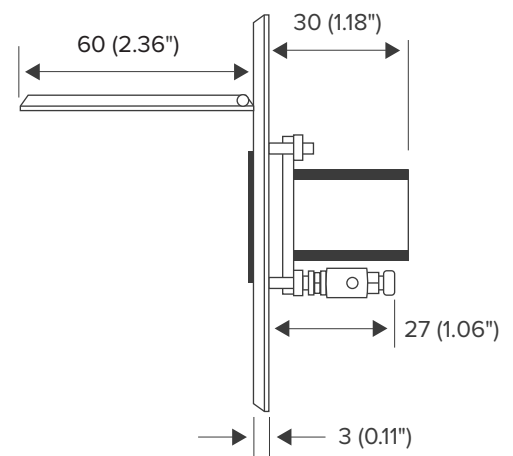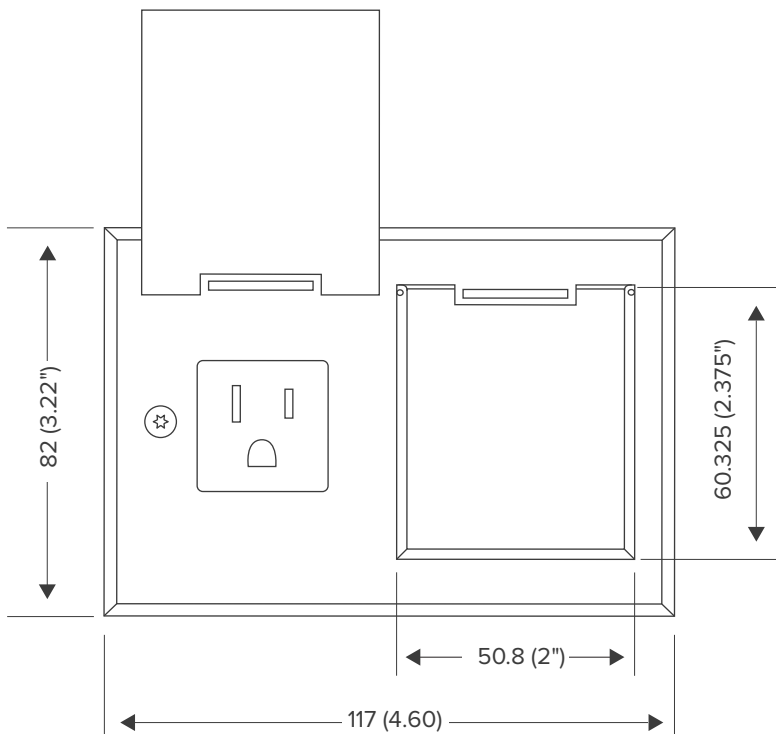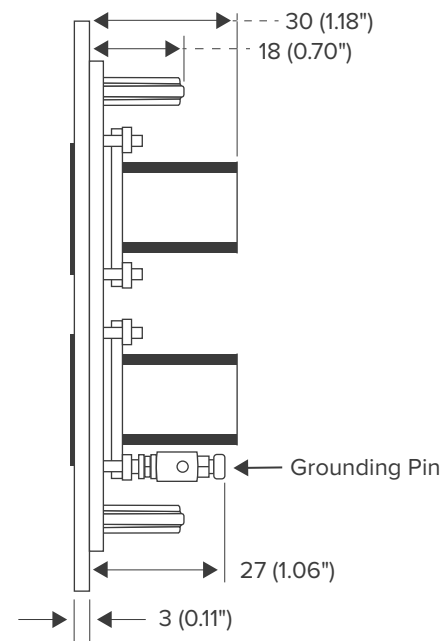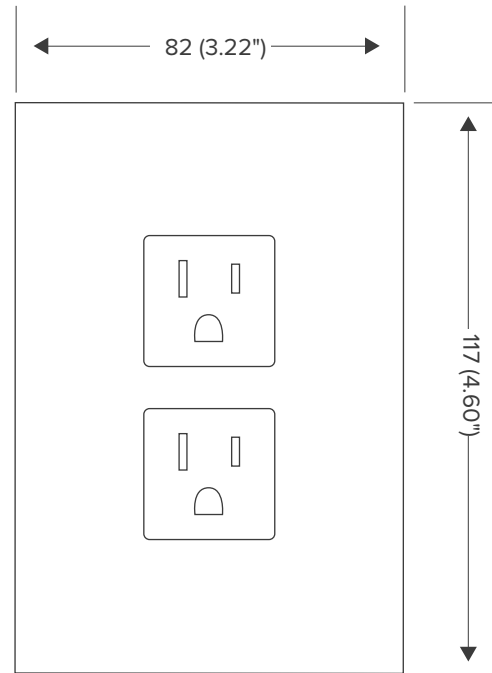
Conforms to UL 514A and CSA22.2 18
IP20

CARE / CLEANING INSTRUCTIONS

To protect the integrity of the finish, no chemicals or cleaning solutions should ever be used. Dry dust rags or microfiber cloths only.

DIMENSIONS & DRAWINGS

Measurements: mm (inches)

82 (3.22")

117 (4.60")

30 (1.18")
18 (0.70")

Grounding Pin

27 (1.06")

3 (0.11")

Supplied 6-32
Flat Torx Head
Machine Screw

40 (1.57")

82 (3.22")

60.325 (2.375")

50.8 (2")

117 (4.60")
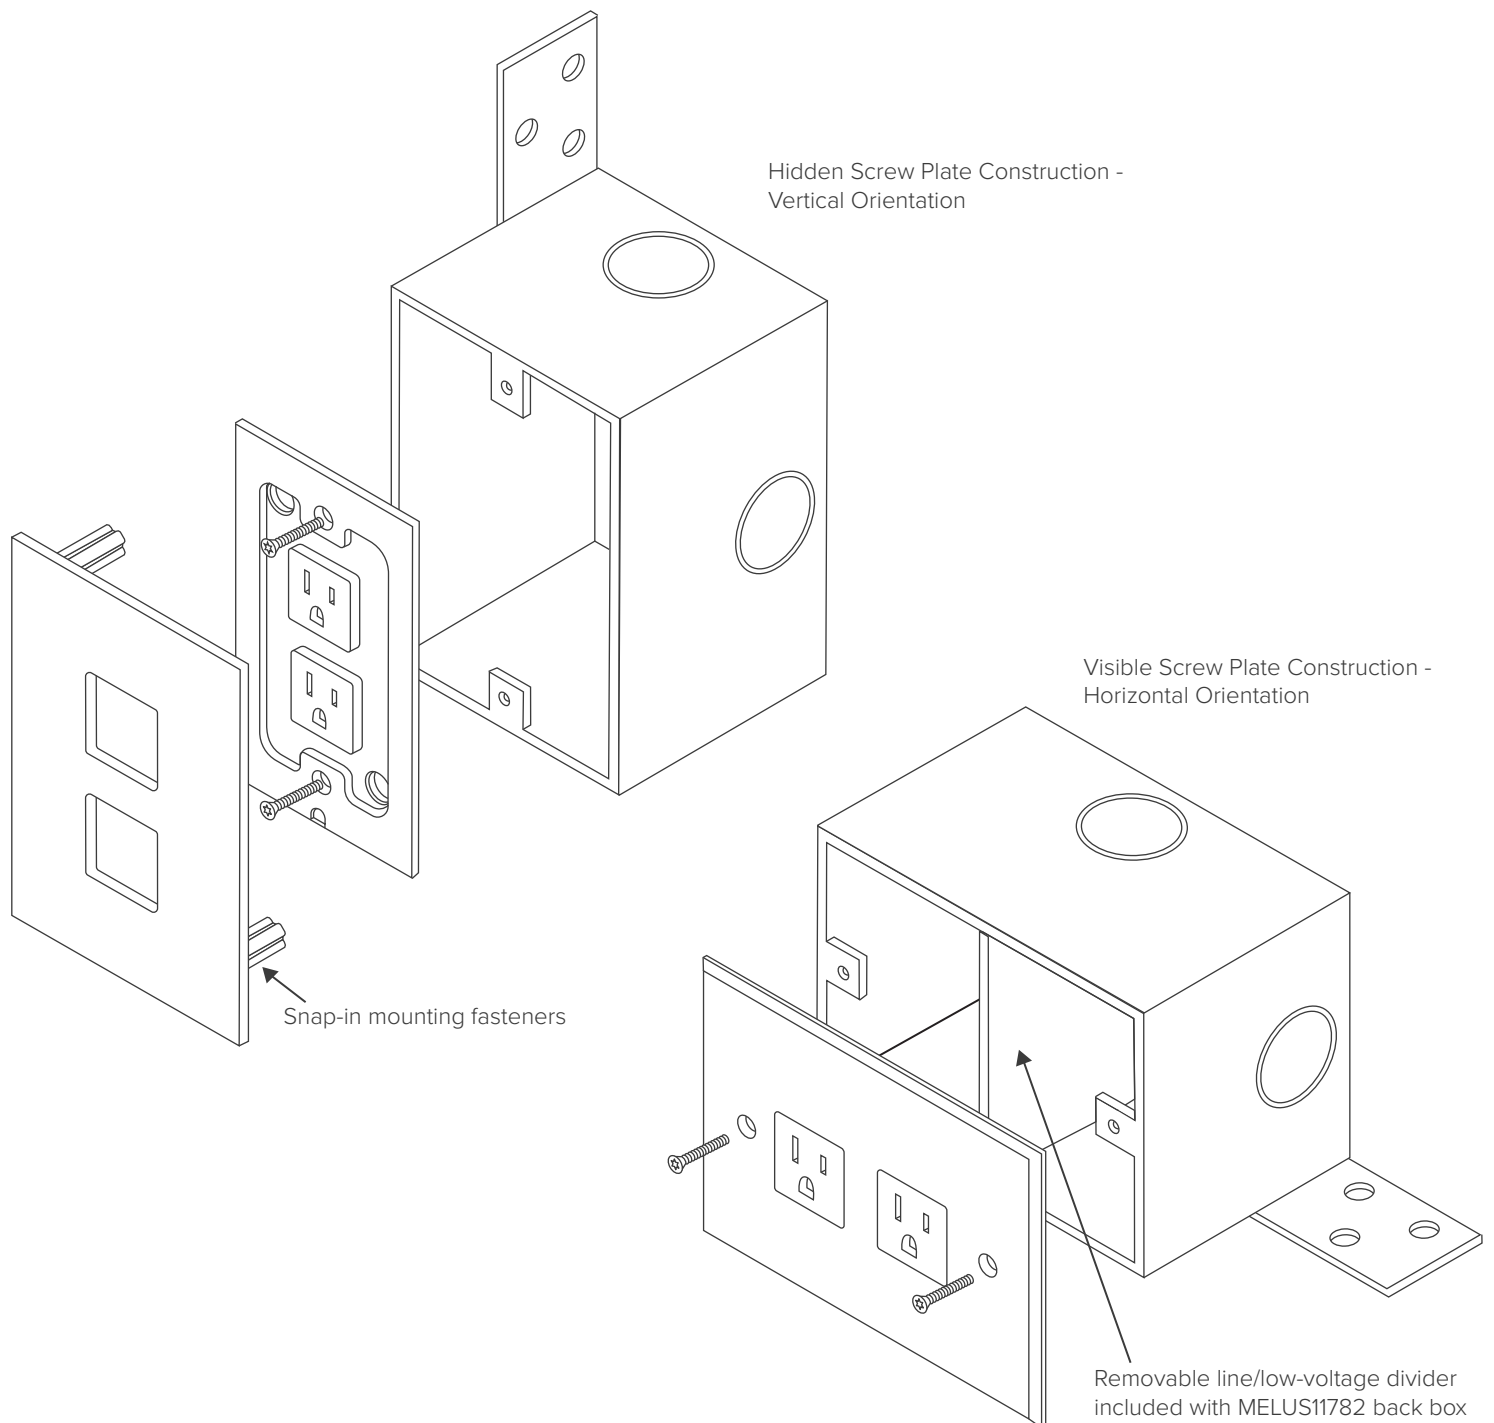
60 (2.36")

30 (1.18")

27 (1.06")

3 (0.11")

WALL OUTLETS – 117 MM || MOUNTING DRAWINGS

BACK BOX

MELUS11782

117 mm plates may also be used with 3rd party single-gang boxes or rings. However, for hidden-screw plates the back box compatibility MUST be confirmed. See our Plate Size & Back Box Guide for more information.

Hidden Screw Plate Construction - Vertical Orientation

Visible Screw Plate Construction - Horizontal Orientation

Snap-in mounting fasteners

Removable line/low-voltage divider included with MELUS11782 back box

WALL OUTLETS – 117 MM || SPECIFICATION SHEET

PROJECT NAME: _____

SPECIFIER: _____

**PLATE FINISH:** _____

SCREW TYPE Select one

- ☐ Visible - Torx Head
- ☐ Visible - Slot Head
- ☐ Hidden

PLATE ORIENTATION Select one

- ☐ Vertical
- ☐ Horizontal

EDGE TYPE Select one

- ☐ Beveled
- ☐ Straight

BACK BOX Select one

- ☐ Meljac MELUS11782 (metal / new construction)
- ☐ Single-gang plaster ring (must confirm hidden screw compatibility)
- ☐ Cantex 1-gang EZ-Box
- ☐ 3rd Party - Manufacturer + Model Number: _____

RECEPTACLES AND PORTS Mark "1" for port space one; mark "2" for port space two.

- ☐ 15A 125VAC TR Receptacle - Black
- ☐ 15A 125 VAC TR Receptacle - White
- ☐ 20A 125VAC TR Receptacle - Black
- ☐ 20A 125VAC TR Receptacle - White
- ☐ USB-A Charging Port (2.1A 5VDC)
- ☐ RJ45 Data Receptacle (Cat6)
- ☐ RJ11 Phone Jack Receptacle
- ☐ F Connector Cable Receptacle
- ☐ Speaker Binding Posts
- ☐ HDMI Port
- ☐ Cable Pass-Thru

CONFIGURATIONS Select one

- ☐ Horizontal - No Covers
- ☐ Horizontal - Single Cover
- ☐ Horizontal - Two Covers
- ☐ Vertical - No Cover
- ☐ Vertical - Single Cover

Note: if an alternate configuration is required, please contact Meljac North America for confirmation.